

HIGHBAY/LOWBAY PRISMATIC



Save energy 4 you



IP RATING

43



INTERIOR LIGHTING

GLHBP-100/150/200/250

Features

- Die cast aluminum ballast casing with powder coated finish for corrosion-resistance.
- High temperature-resistant polycarbonate hood.
- Highbays are equipped with an inner reflector.

Lamp and Ballast

- **SE4Y** 100W - 250W round tubular induction lamp features high lighting efficacy, long lifetime, good colour rendering, stable output, etc.
- **SE4Y** electronic ballast features high power factor (>0.95), flicker free, low loss, constant output, etc.


Application

- Stadium, workshop, warehouse, airport, railway station, amusement park, exhibition hall, supermarket, factory, barn.



HIGHBAY/LOWBAY PRISMATIC


DIMENSIONS

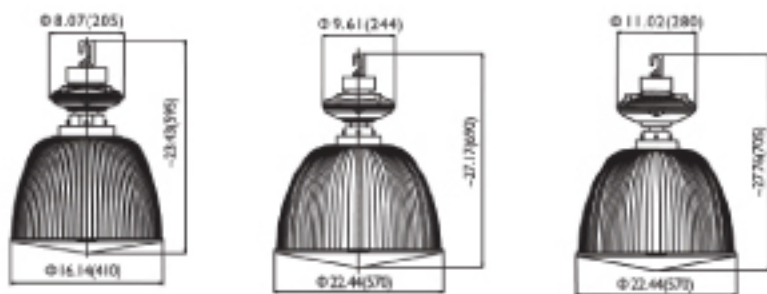

GLLBP-100

GLHBP-150/200/250

PHOTOMETRIC

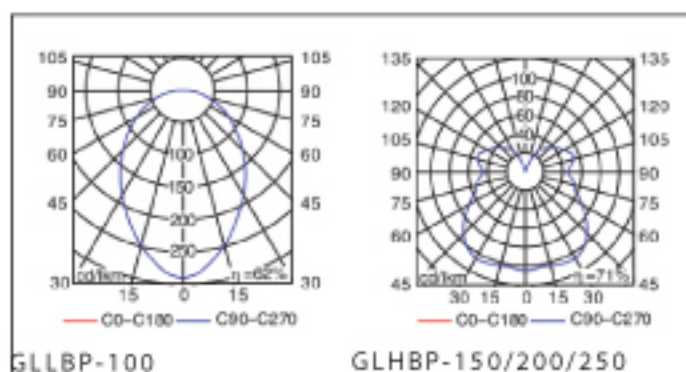

GLLBP-100

GLHBP-150/200/250



GLHBP-100/150/200/250

FIXTURE SPECIFICATIONS

Code	Brief Desc.	Wattage	Voltage	Colour Temperature	Ambient Temperature	IP Class	Note
GLLBP-100	Lowbay	100	120~277	5000	-20°C~+40°C	43	Inner Reflector
GLHBP-150	Highbay	150					
GLHBP-200		200					
GLHBP-250		250					
			208~347*				

*available in 200/250 wattages only

Note: Colour Temperature 2720-6500 available upon request.



www.globalindustrialighting.com
info@globalindustrialighting.com