



Save energy 4 you

INTERIOR

INTERIOR LIGHTING



IP RATING
20

GLIN-250/400

Features

- White powder coated steel frame for corrosion resistance.
- Low glare, anodized aluminum parabolic louver for excellent visual control.

Lamp and Ballast


- **SE4Y** 250-400W square tubular induction lamp features high lighting efficacy, long lifetime, good colour rendering, stable output, etc.
- **SE4Y** electronic ballast features high power factor (>0.95), flicker free, low loss, constant output, etc.

Application


- Office, shopping malls, railway station, schools, workshop, etc.

INTERIOR

DIMENSIONS

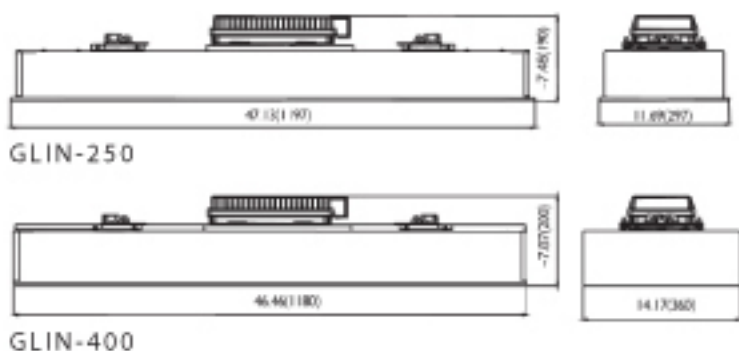

PHOTOMETRIC

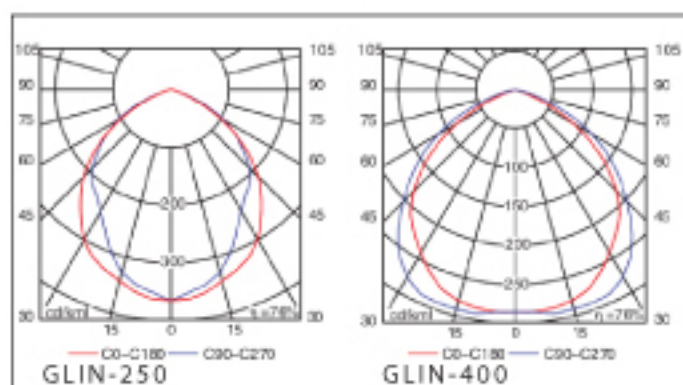

FIXTURE SPECIFICATIONS

Code	Brief Desc.	Wattage	Voltage	Color Temperature	Ambient Temperature	IP Class	Note
GLIN-250	Interior	250	120~277	5000	0°C~+40°C	20	Anodized Aluminum Parabolic Louver
GLIN-400		400					

Note: Colour Temperature 2720-6500 available upon request.

GLIN-250/400

www.globalinductionlighting.com
info@globalinductionlighting.com